

● ICS Sistem

ICS Cam Balkon Sistemlerinde kullanılan tüm aksesuar ve malzemelerin üzerinde kalite güvencesi olan BKS logosu bulunmaktadır.

ICS Cam Balkon Sisteminde kullanılan alüminyum profiller,BKS Katlanır Sistemleri'ne özgü dizayn ile özel olarak üretilmiş,kalitesi kanıtlanmış, tescilli ürünlerdir.

ICS Cam Balkon Sistemlerindeki bazalar 30 mm cam kullanımına uygun olarak üretilmiştir.

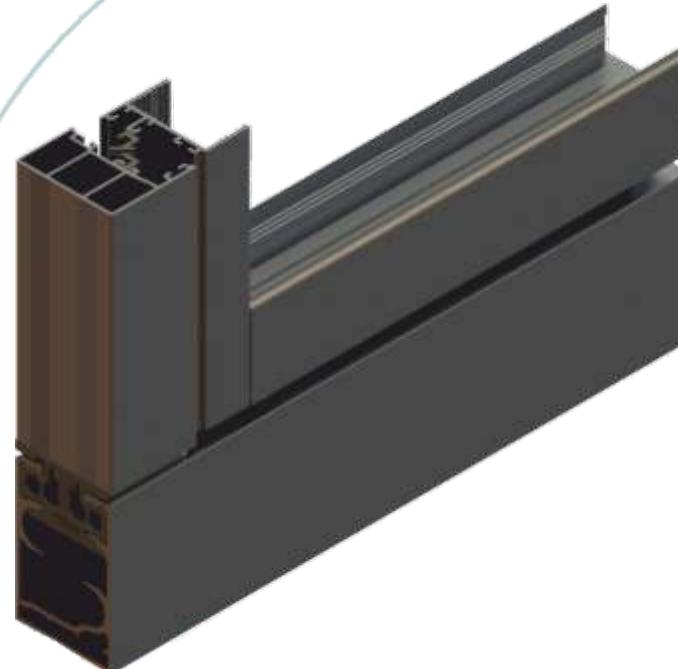
ICS Cam Balkon Sistemlerinde; Pres,Eloksal,Bronz olarak standart renkler mevcuttur.

ICSCam Balkon Sistemlerinde teker bağlantı ayakları oksitlenmeye karşı paslanmaz çelikten üretilmiştir.

ICS Cam Balkon Sistemleri; istenildiğinde üstten taşınmalı,istenildiğinde alttan taşınmalı olarak monte edilme irkânına sahiptir.Her bir kanatta 8 rulman vardır. Sistem üstten monte edilirse; üstteki 4 rulman taşıyıcı görevi yapar,alttaki 4 rulman kılavuzlama yapar.Sistem alttan monte edilirse; alttaki 4 rulman taşıyıcı görev yapar,üstteki 4 rulman kılavuzlama yapar.

ICS Cam Balkon Sisteminde dik ve yatay profillerin bağlantısında dış yüzeyden gözle görülmeyen plastik aparat kullanılarak görsel bütünlüğü sağlanmıştır.

ICS Cam Balkon Sisteminde dik profiller arasında mıknatıslı fitille yalıtım sağlanmaktadır. Ayrıca dikey kullanıma sahip profillerde bulunan kanallar sayesinde istenildiği takdirde mıknatıslı fitille beraber kil fitil kullanımına da olanak sağlamaktadır.



● ICS Systems

All accessories and materials used on ICS Glass Balcony System have got BKS logo as quality assurance as.

The aluminum profiles used in the ICS glass Balcony System, are proprietary products with proven quality and specially produced with unique design of BKS Folding Glass Systems

The frame profile used in ICS Glass Balcony Systems has been designed and manufactured with two- channelled enabling conveyance of double bearings in each pillar.

The base profiles of ICS Glass Balcony Systems has been produced for 30 mm glasses.

In ICS Glass Balcony Systems are available standard colors as: Press, Anodized, Bronze.

The Wheel support brackets of BKS Glass Balcony Systems have been made of stainless steel against corrosion.

ICS Glass Balcony Systems can be mounted with a particular of top-conveyance and bottom-conveyance when deemed necessary. There are 8 bearings in each wing.

If the system is mounted from the top, 4 bearings at the top assume conveyance, and 4 bearings at the bottom assume guidance.





If the system is mounted from the bottom, 4 bearings at the bottom assume conveyance, and 4 bearings at the top assume guidance.

For connection of vertical and horizontal profiles in ICS Glass Balcony System visual integrity is provided by the way using plastic apparatus invisible from the outer surface.

Has provided system insulation using of magnetic seals between vertical profiles on ICS Glass Balcony System. Furthermore, it is possible to use even hair seals instead of magnetic seals, thanks to channels inside of vertically proposed profiles.

DAMLAŞLIK PROFİLİ	W.6288.00	ICS CAM ARA PROFİLİ 30 MM ELOKSAL	ICS CAM BALKON SİSTEMLİ NUMUNESİ
EYEDROPPER PROFILE	W.5004	ICS INTERMEDIATE PROFİL 30 MM	ICS DOUBLE GLAZED SYSTEM SAMPLE
ICS BAĞLANTı PLASTİĞİ	W.5100	ICS 135 DERECE DİKME PROFİLİ ELOKSAL	ICS YAN DİKME PROFİLİ ELOKSAL
ICS PLASTİK BAĞLANTı PLASTİĞİ	W.5005	ICS PROFILE 135 DEGREE	ICS SIDE COLUMN PROFILE
ICS PLASTİK KILIT ALT ÜST HALKALı	W.5110	BKS KASA PROFİLİ (ALT&UST)	ICS KÖŞE DİKME PROFİLİ ELOKSAL
YAN DİKME PROFİLİ	W.5500	ICS PLASTIC LOCK WITH RING BOTTOM-TOP	ICS ANGLE PROFILE
DROPPER LOWER FRAME PROFILE	W.6118.00	BKS DAMLALIKLI KASA PROFİLİ ALT	ICS CAM BAZA PROFİLİ 30 MM ELOKSAL
SIDE COLUMN PROFILE	W.5003	BKS FRAME PROFILE (BOTTOM & TOP)	ICS BASE PROFILE 30 MM

BKS-KCS DÜZ TEKER (METAL PİMLİ)	ALÜMİNYUM KİLİTLİ TEKER	ICS 90.135, YAN DİKME MİKNAŞLI FİTİL (50 M)
W.6285.01	W.6291.02	W.5501
		
BKS-KCS PLAIN WHEEL (METAL PIN)	ALUMINUM PLAIN WHEEL	ICS SIDE COLUMN, 90 AND 135 DEGREE MAGNET SEAL (50M)
BKS-KCS ALT-ÜST MENTEŞE	DEKORATİF KULP	
W.6271.00	W.6219.00	W.6247
		
BKS-KCS HINGE BOTTOM AND UP	DECORATIVE HANDLE	
W.6244.00	W.6220.00	W.6289.00
		
YANDIKME APARATI	YAĞMUR ÇITASı	RAIN STREAMER
W.6265.45	W.6284.00	W.6292.01
		
SIDE COLUMN EQUIPMENT		
BKS STOPPLAMA (45 MM)	BKS-KCS KİLİTLİ TEKER (METAL PİMLİ)	ALÜMİNYUM DÜZ TEKER
W.6265.45	W.6284.00	W.6292.01
		
BKS STOPPER (45 MM)	BKS-KCS STAINLESS LOCKING WHEEL (METAL PIN)	ALUMINIUM LOCKED WHEEL

BKS ÇIKIŞ AÇILI PLASTİK ALT W.6224.00	BKS-KCS-ANK FREN W.6221.00	MAFSALLI GÖNYE W.6240.00
		
BKS OUTLET PLASTICS BOTTOM W.6224.00	BKS-KCS-ANK BRAKE W.6221.00	HINGED T-SQUARE W.6240.00
		
BKS-KCS-ANK ALT MENTEŞE (PASLANMAMAZ) W.6287.01	BKS-KCS KIRLANGIÇ GEÇMELİ FREN W.6272.00	BAĞLANTI GÖNYESİ W.6233.00
		
BKS-KCS-ANK BOTTOM HINGE (STAINLESS) W.6225.00	BKS-KCS DISCONNECTED PARE BRAKE W.6248.00	ANGLE IRON W.6222.01
		
SABİT MENTEŞE W.6225.01	SABİT MENTEŞE W.6248.01	BKS-KCS LUX KİLİT ALT-ÜST W.6222.01
		
FIXED HINGE W.6243.01	KSKCS LUX LOCK BOTTOM-TOP W.6248.03	BKS-KCS LUX KİLİT ALT-ÜST OTOM. W.6222.02
		
BKS KATLANIR KILAVUZLU ÇIKIŞ AĞZI SOL ÜST W.6243.01	BKS-KCS LUX KİLİT ALT-ÜST OTOM. W.6248.03	BKS-KCS LUX BRAKE BOTTOM W.6222.02
		
BKS OUTLET COLLAPSIBLE GUIDED LEFT TOP W.6243.01	BKS OUTLET COLLAPSIBLE GUIDED LEFT TOP W.6248.03	BKS-KCS LUX BRAKE BOTTOM W.6222.02
		

4,5 mm BONCUKLU PLASTİK İP W.6001.00	SÜRME KIL FİTİL 67*1000 W.6710.00	BKS KATLANIR KILAVUZU ÇIKIŞAĞI SAĞ ÜST W.6243.02
		
4,5 PLASTIC BEAD ROPE W.6273.00	SLIDING SHUTTER HAIR SEAL 67*1000 W.6231.00	BKS OUTLET COLLAPSIBLE GUIDED RIGHT TOP W.6270.01
		
ANK-DRT-BRK LUX KİLİT ZİNCİRİ (KROM) W.6274.00	SİLİKON FİTİL (YAN DİKME FITİLİ 50 MT (BEYAZ)) W.6231.00	BKS OTOMATİK KATLANIR KILAVUZU ÇIKIŞAĞI SOL ÜST W.6270.02
		
MORTISE LOCK CHAIN (CHROME) W.6276.00	SİLİKON FİTİL (YAN DİKME FITİLİ 50 MT (SİYAH)) W.6231.00	BKS OUTLET AUTOMATIC COLLAPSIBLE GUIDED LEFT TOP W.6270.01
		
KROM ZİNCİR (KROM) W.6276.00	SİLİKON FİTİL (YAN DİKME FITİLİ 50 MT KAHVE) W.6231.00	SÜRME KIL FİTİL 67*1200 W.6712.00
		
CHRİOME CHAIN (CHROME) W.6276.00	SİLİKON SEAL (SİDE COLUMN SEAL 50 MT (BROWN)) W.6231.00	SLİDİNG SHUTTER HAIR SEAL 67*1200 W.6231.00
		